
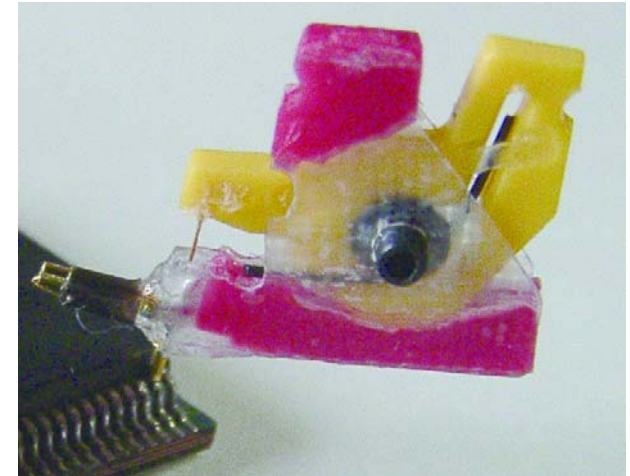


|     |             |          |     |
|-----|-------------|----------|-----|
| REV | DESCRIPTION | DATE     | BY  |
| A   | NEW DRAWING | 11/13/08 | JAG |

F8122

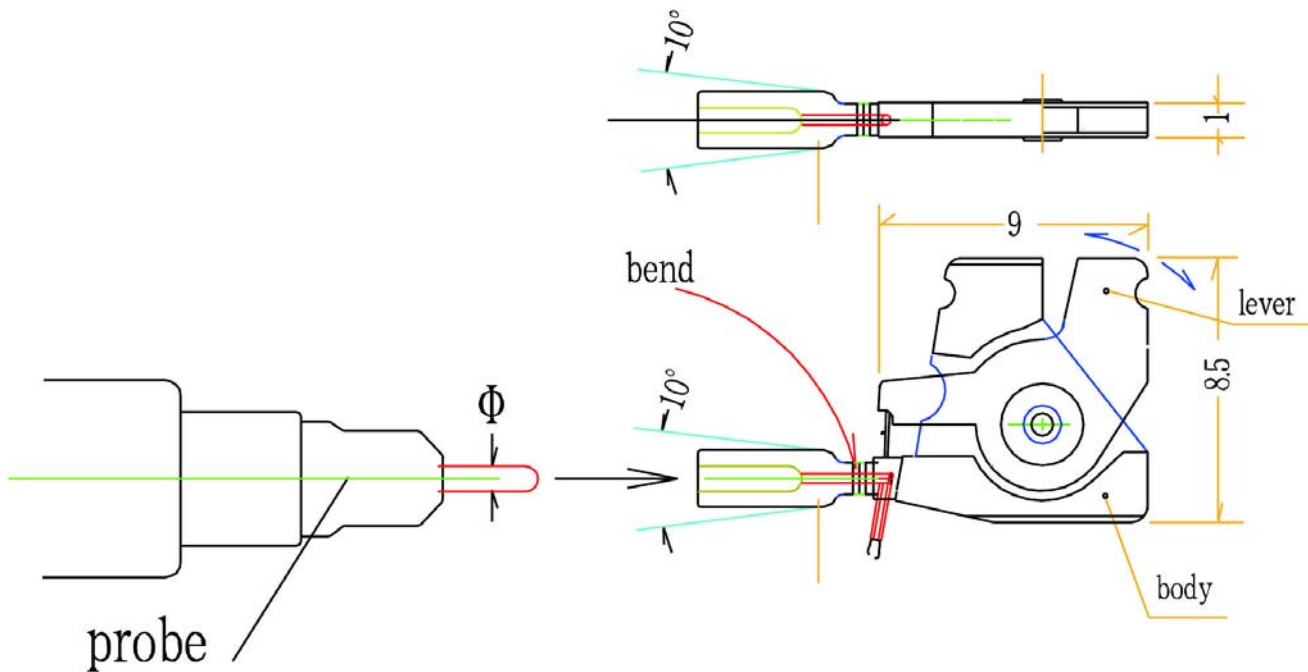

| Item #   | Accessible IC Pitch | Probe Side Pin Contact Size<br>Φ | Color |        |
|----------|---------------------|----------------------------------|-------|--------|
|          |                     |                                  | Body  | Lever  |
| FPN-DMFC | 0.65 ~ 1.25         | 0.65 ~ 0.86                      | Blue  | Yellow |
| FPN-DSFC | 0.3 ~ 0.65          | 0.65 ~ 0.86                      | Red   | Yellow |
| FPN-DMKC | 0.65 ~ 1.25         | 0.38 ~ 0.64                      | Blue  | Yellow |
| FPN-DSKC | 0.3 ~ 0.65          | 0.38 ~ 0.64                      | Red   | Yellow |


**NOTES**

1. Bandwidth: HIGH-SPEED, DC ~15GHz
2. Length of current-carrying part: 2~5mm
3. Conductor resistance: 3mΩ
4. Contact resistance: 10mΩ
5. Withstanding voltage: 80VDC
6. Operating temperature rating: 0°C ~ 80°C (no condensation)

TEST CLIP allows electrode to bend 10°.

The use of a magnifying glass is advised when looking at the tip.

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

|   |                            |  |  |
|---|----------------------------|--|--|
|  |                            | <b>EMULATION TECHNOLOGY, INC.</b><br>VLSI and SMT ADAPTERS and ACCESSORIES |  |
|   |                            | 759 FLYNN ROAD<br>CAMARILLO, CA 93012                                      | TEL: (805) 383-8480<br>FAX: (805) 383-8484 |
| SHEET:<br>1 OF 1  | DATE:<br>11/13/08          | REVISION:<br>A   | <b>ASSEMBLY DRAWING</b>                    |
| CHECKED:  | PREPARED BY:<br>J. GELACIO | ITEM:<br>FPN-DXYC  | DESCRIPTION:<br>SOCKET STRAIGHT TYPE       |
| <b>DO NOT SCALE DRAWING</b>   |                            |  |  |